

Research Progress of New Aeroneneneba Gel Materials

Yong Kang¹, Liyong Zhou^{1,*}, Shanbo Zhou¹, An Mao², Qi Li^{2,*}

¹Department of Quartermaster Procurement, Army Logistics Academy of PLA, Chongqing, China

²College of Forestry, Shandong Agricultural University, Tai'an, China

Email address:

18627075099@163.com (Yong Kang), zhouliyong1@163.com (Liyong Zhou), wonderfulliqi2364@126.com (Qi Li)

*Corresponding authors

To cite this article:

Yong Kang, Liyong Zhou, Shanbo Zhou, An Mao, Qi Li. Research Progress of New Aeroneneneba Gel Materials. *American Journal of Mechanical and Materials Engineering*. Vol. 6, No. 3, 2022, pp. 39-43. doi: 10.11648/j.ajmme.20220603.13

Received: September 12, 2022; **Accepted:** September 26, 2022; **Published:** October 11, 2022

Abstract: Aeroneneneba gel is a porous material with three-dimensional network structure and is obtained after drying of wet gel. It is a solid with the smallest density and is composed of nanoparticles or polymer molecular chains. Its structure is three-dimensional nanostructure. It has many excellent characteristics, such as low density, high porosity, large pore volume and large specific surface area. Therefore, the material has excellent characteristics in light, heat, sound, electricity and mechanics. In recent years, scholars at home and abroad have conducted in-depth research on a variety of aeroneneneba gels and developed a variety of new and excellent aeroneneneba gel materials. The emergence of aeroneneneba gel materials has great potential in the preparation of thermal insulation materials, electrode materials and other fields. Aeroneneneba gel materials have been applied in many fields, especially in the fields of military aerospace, building thermal insulation materials, electrical parts materials and so on. This paper introduces the current methods of preparation and modification of aeroneneneba gel, as well as the application and development status of aeroneneneba gel materials in different fields, especially in the fields requiring excellent thermal protection properties, such as military, aerospace, etc. the future development and application of aeroneneneba gel materials will be more extensive.

Keywords: Aeroneneneba Gel Materials, Organic Aeroneneneba Gel, Oxide Aeroneneneba Gel, Carbon Aeroneneneba Gel

1. Introduction

Aeroneneneba gel is a new material with three-dimensional network structure. The density of aeroneneneba gel material is very small, only 3.55kg/m^3 , which is the lowest among all solids. Therefore, some people call aeroneneneba gel material "solid smoke". This material not only has the functions of expansion and plasma separation, but also has a large specific surface area and good thermal insulation performance. The good thermal insulation performance determines that aeroneneneba gel material can be used as an excellent thermal insulation material. Therefore, aeroneneneba gel materials have been widely used in aerospace, fire safety, social life and other industries and fields in recent years [1].

The preparation of aeroneneneba gel materials mainly includes two stages, the first stage is wet gel preparation, and the second stage is wet gel drying. In the two processes of the preparation of aeroneneneba gel, the first step is to prepare

wet gel. The sol-gel method is used to synthesize wet gel. The preparation process of wet gel is the first step of the synthesis of aeroneneneba gel. The whole process of preparing aeroneneneba gel is very critical. The network structure, porosity and other parameters of aeroneneneba gel are determined by this process. The second step is the drying of the wet gel. The gel prepared in the first step is dried to replace the liquid dispersion medium in the hydrogel with the gas state, and the aeroneneneba gel is finally prepared after specific treatment. There are many methods used in the drying. The most commonly used methods in the current research are supercritical drying, subcritical drying, freeze drying and atmospheric pressure drying.

2. Research Progress of New Aeroneneneba Gel Materials

At present, the research of aeroneneneba gel materials is extensive, and more and more kinds of aeroneneneba gel

have been developed. According to its composition, it can be roughly divided into oxide aeroneneneba gel, organic

aeroneneneba gel, carbon or carbide aeroneneneba gel and other types (Figure 1).

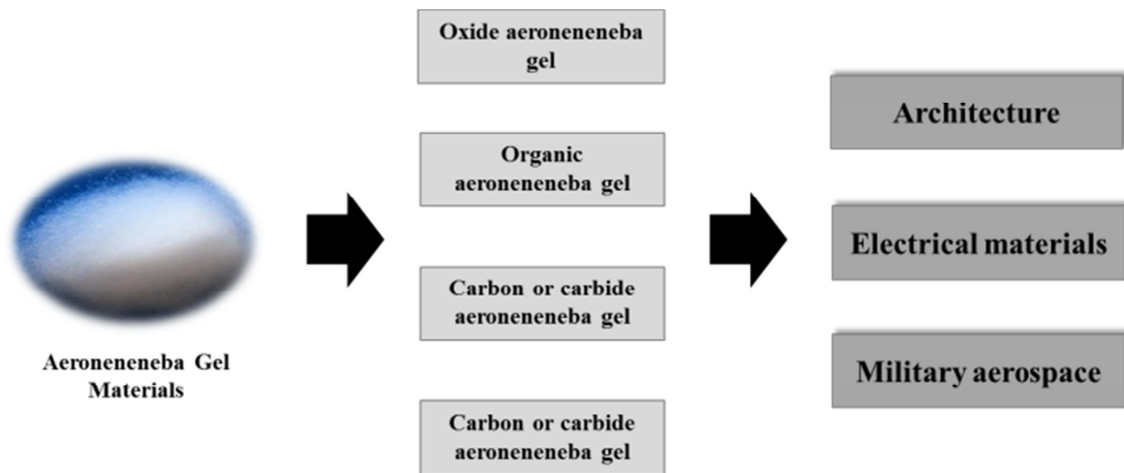


Figure 1. Aeroneneneba gel materials and applications.

2.1. Oxide Aeroneneneba Gel

The oxide aeroneneneba gel thermal insulation material has the characteristics of high temperature resistance and low thermal conductivity. The oxide aeroneneneba gel material can also be compounded with the high-temperature resistant oxide ceramic fiber to prepare a composite material with better performance. The prepared composite material has high strength and good processability. The composite material can be processed into large-size samples. Therefore, it is the most important type of aeroneneneba gel in aerospace thermal insulation applications at present. Among them, there are mainly SiO_2 aeroneneneba gel and two-component oxide aeroneneneba gel.

Silica (SiO_2) aeroneneneba gel has been gradually developed by scholars in the last century. Its structure is also nano porous, which is a super thermal insulation material with excellent thermal insulation effect. Because this aeroneneneba gel has the structural characteristics of large specific surface area, large porosity and low density, these structural characteristics make the material have many excellent properties, such as extremely low thermal conductivity and high adsorption and load capacity. Among many oxide aeroneneneba gels, SiO_2 aeroneneneba gel is the most widely studied and most mature aeroneneneba gel used in thermal insulation applications. In recent years, the research directions of SiO_2 aeroneneneba gel thermal insulation materials at home and abroad mainly focus on mechanical enhancement, suppression of high temperature radiation heat transfer and atmospheric drying.

Some studies [2] have successfully prepared glass fiber reinforced SiO_2 aeroneneneba gel by sol-gel method. The prepared aeroneneneba gel has low thermal conductivity, and its thermal conductivity is measured to be $26\text{MW}/(\text{m}\cdot\text{K})$. At the same time, it also increases the bending modulus of this aeroneneneba gel, reaching 1194MPa . Yang et al. [3] prepared SiO_2 aeroneneneba gel with water glass as silicon

source with lower cost. This study summarized and proved the influence of different preparation conditions on the length of reaction gel time. The average pore diameter and specific surface area of the samples prepared in this study are better. Industrial water glass is the conventional silicon source of SiO_2 aeroneneneba gel, which has been deeply studied. In addition to this silicon source, some industrial residues and production wastes can also be processed into water glass, such as wheat straw and fly ash. The application of these materials also increases the way of silicon source of aeroneneneba gel. Xia et al. [4] prepared SiO_2 aeroneneneba gel with porosity of about 90% and good pore volume and specific surface area by sol-gel method and vacuum freeze-drying method with straw ash as raw materials. Yi et al. [5] successfully prepared a nano fiber reinforced SiO_2 aeroneneneba gel through sol-gel method combined with ethanol supercritical drying technology. The addition of such nano fibers effectively increased the compression strength of the aeroneneneba gel, making the compression strength of the modified SiO_2 aeroneneneba gel more than 6Mpa . At the same time, the maximum allowable temperature of the aeroneneneba gel reached 1200°C . Chakraborty et al. [6] prepared tetraethoxysilane fiber reinforced SiO_2 aeroneneneba gel through gel, silylation and atmospheric pressure drying, which effectively improved the hydrophobicity of aeroneneneba gel. With the increase of the concentration of silylating agent, the thermal protection performance of the composite aeroneneneba gel was improved.

2.2. Organic Aeroneneneba Gel

Compared with traditional inorganic aerogels, organic aerogels are based on polymer molecular chains. In terms of characteristics, organic aerogels not only retain the advantages of inorganic aerogels such as low density, high porosity and low thermal conductivity, but also determine the performance of gel. Therefore, organic aerogels have flexible

molecular designability and performance adjustability. Phenolic resin has the characteristics of high residual carbon rate and heat resistance. After carbonization, the structure is compact and stable. It is often used as the precursor of carbon aerogel [7]. During the ablation process of phenolic aerogel, two substances are generated by thermal decomposition, i.e. pyrolysis gas and pyrolysis carbon. The heat will be dissipated in the boundary layer. The heat dissipation is caused by the thermal blocking effect and mass ejection effect. The thermal conductivity of phenolic aerogel and its pyrolysis carbon aerogel is low, the thermal insulation effect lasts for a long time, the preparation time of phenolic aerogel is short, the process is simple, the raw materials are widely sourced, and the cost is low. Therefore, Phenolic aerogel has great application potential in many high-temperature thermal insulation and heat protection fields. In the past decade, the research on phenolic aerogel thermal insulation materials has mainly focused on improving its anti-ablation performance, thermal insulation performance and mechanical properties under high temperature and aerobic environment [8]. In terms of improving the thermal insulation performance of phenolic aerogel, by adjusting the microstructure of phenolic aerogel, its thermal conductivity at normal temperature can be effectively reduced, and phenolic aerogel with different thermal insulation properties can be obtained [9]. Phenolic aerogel can also be compounded with inorganic aerogel (such as SiO_2 aerogel, Al_2O_3 aerogel, etc.), and the thermal insulation performance of the material can be improved by using the nano porous structure and intrinsic low thermal conductivity of inorganic aerogel [10].

Polyimide (PI) is a kind of high-performance resin. Its aromatic heterocyclic structure makes it have good thermal stability and mechanical properties, and can resist high temperature and Corrosion [11]. Polyimide aerogel has the advantages of low density and low thermal conductivity, and has a broad application prospect in aerospace field. In the past decade, the research on polyimide aerogel thermal insulation materials mainly focused on inhibiting shrinkage, improving temperature resistance, and polyimide aerogel fibrosis. Although polyimide aerogel can be used at higher temperatures, its high temperature resistance still needs to be improved when it is used as an organic aerogel in the aerospace field [12]. A sol-gel confined transformation method was proposed by the Suzhou Institute of nano science, Chinese Academy of Sciences to prepare polyimide aerogel fibers with high specific surface area ($364 \text{ m}^2/\text{g}$), excellent mechanical properties and super hydrophobic structure, which solved the fibrotic problem of polyimide aerogel [13].

2.3. Carbon or Carbide Aerogel

Carbon and carbides have very stable chemical properties and are substances with high melting point. By making use of

their high-temperature resistance characteristics, they can be made into aerogel structure, and can be used to prepare ultra-high temperature resistant aerogel thermal insulation materials. Therefore, they are applied in military equipment, aerospace and other high-temperature fields. Carbon aerogel not only has most of the advantages of traditional aerogel, but also has excellent characteristics such as mesoporous structure, high infrared extinction coefficient, acid and alkali resistance and degradability, which can withstand 2800°C ultra-high temperature in inert atmosphere. When applied to the ultra-high temperature thermal protection parts of new high-speed aircraft, carbon aerogel shows more excellent performance and greater application value.

In the past decade, the research focus of carbon aerogel thermal insulation materials mainly focuses on the improvement of mechanical properties, process simplification and low-cost preparation, oxidation resistance, ablation resistance and ultra light and ultra elastic.

In terms of simplification of carbon aerogel process and low-cost preparation, long-term solvent replacement and complex and high-cost supercritical drying process have always restricted its industrial application. Research shows that proper network strength, increased particle size/macroporous network and low surface tension are of great significance to reduce pore structure collapse and shrinkage during atmospheric drying [14].

Carbide aerogel is a new type of aerogel developed in recent years, which has attracted the attention of many experts and gradually developed. Carbide aerogel has many excellent properties, such as corrosion resistance, high hardness, high melting point, and stable mechanical properties. Carbon aerogel and organic aerogel insulation materials will be partially oxidized at high temperature. Compared with these two aerogels, the high-temperature oxidation resistance of carbide aerogel is more remarkable [15]. The intrinsic thermal conductivity of carbides is high, and the high porosity and three-dimensional network structure can greatly reduce its thermal conductivity. Nano thermal insulation materials are prepared for high-efficiency thermal insulation. SiC aerogel has stable chemical properties and is a potential high-temperature thermal insulation material. It not only has small thermal expansion coefficient, high specific extinction coefficient and good thermal shock resistance, but also can withstand high temperature above 1000°C in the air. It also shows excellent performance in the environment with strong corrosion, strong thermal shock and serious electromagnetic interference. Therefore, it is suitable for a variety of harsh environments [16].

3. Application of New Aerogel Materials

3.1. Architecture

Since the thermal conductivity of aerogel is very

low, aeroneneneba gel materials are very suitable for making thermal and cold insulation materials. In addition, the density of aeroneneneba gel materials is small and the thickness of the materials is low, which also has a good advantage in space saving.

In the construction stage of the construction industry, many resources are consumed. In such a high-energy consumption industry, the advantages of aeroneneneba gel materials are very obvious. High temperature resistant aeroneneneba gel has excellent performance, which not only has the advantage of low thermal conductivity, but also has low density. It has great potential in the application of insulation materials in the construction industry. For the application of aeroneneneba gel particles in the construction industry, they are usually used to add them, which can better play the thermal insulation effect of aeroneneneba gel materials. Sometimes they are mixed with a variety of different materials. Generally, the diameter of aeroneneneba gel particles is 0.5-5.0 mm, with a small density. When used in construction projects, aeroneneneba gel particles can be mixed with traditional inorganic materials used in buildings. The building materials prepared by mixing aeroneneneba gel have better thermal insulation performance. This method can prepare more effective thermal insulation mortar [17]. At present, most of the insulation materials used in the construction industry is mainly EPS and other kinds of felt materials. The comprehensive performance of these conventional materials is deviated, the thermal insulation performance is uneven, the thermal insulation effect is not good enough, and the service life is short [18]. As an essential material in the construction industry, thermal insulation materials must have better performance. After the use of aeroneneneba gel thermal insulation materials, the disadvantages of traditional thermal insulation materials are compensated. Under the excellent performance of greatly reducing the loss of building heat energy, the thermal insulation layer also has a certain fire-retardant performance.

3.2. Electrical Materials

Super capacitor is a new type of energy storage element [19]. It has the technical characteristics of high energy density, fast charging speed, wide temperature range and long service life [20]. It has great application potential in military equipment. The application research on radar, armored vehicles and other military equipment has great significance. It also has great potential in some pulse laser weapons and military countermeasure systems. At present, there are many kinds of materials used to make supercapacitor electrodes. Usually, some materials with good performance and moderate cost are used, such as metal oxides and some polymers with conductive properties [21]. The appearance of aeroneneneba gel materials provides a material with better performance for the fabrication of electrodes. Among them, carbon aeroneneneba gel has great advantages as an electrode material. Compared with these commonly used materials, carbon aeroneneneba gel has three more excellent characteristics: (1) high electrochemical

stability and conductivity; (2) The pore size is adjustable. The pore size of carbon aeroneneneba gel can be controlled by different reaction conditions in the preparation process, such as different catalyst concentration and reactant concentration. The pore size of the prepared aeroneneneba gel materials is also different. The pore size of different sizes has different effects on enhancing or weakening ion transport velocity; (3) The specific surface area is large, and a larger specific surface area increases its reactive active site.

3.3. Military Aerospace

When the aerospace vehicle is running at a high speed, the body shell of the aircraft is subject to the friction of huge air resistance under the condition of high-speed flight. The friction will cause the temperature of the body surface to rise rapidly, and the internal working elements of the aircraft will be damaged if it is in a high temperature state for a long time, thus reducing the service life of the components, and the high temperature will greatly increase the risk of spontaneous combustion of the aircraft. In this case, it is necessary to ensure the safety of the aircraft, High temperature resistant materials with outstanding thermal insulation performance are very important. The thermal insulation materials block the heat transfer from the surface of the body to the inside of the body, thus protecting the components inside the body. In addition to its excellent thermal insulation effect and low density, aeroneneneba gel is also very suitable for aircraft materials, which is of great significance in reducing aircraft load, reducing fuel consumption and extending flight distance [22]. NASA has developed a carbon aeroneneneba gel sandwich material for aerospace thermal protection application. The carbon material in this material is carbon fiber reinforced resin based material, which mainly acts as an ablation component, the oxide aeroneneneba gel material acts as a thermal insulation component, and the good mechanical properties of carbon material can avoid the shedding and deformation of the oxide aeroneneneba gel material during the thermal scouring process. Phenolic aeroneneneba gel thermal insulation material has been widely used in aerospace field due to its advantages of low density, low thermal conductivity, low cost and short preparation cycle. It is applicable to the outer surface of high-speed aircraft with high heat flux density, such as DMC, DMS and ZMS series anti insulation integrated composite materials developed by aerospace materials and Technology Research Institute [23].

4. Conclusion

This paper introduces the current development of new aeroneneneba gel materials, mainly from the aspects of microstructure, preparation methods, classification, and basic properties of different aeroneneneba gel materials. It also summarizes and introduces the development of different kinds of new aeroneneneba gel materials and the applications of various aeroneneneba gels in different fields. The particularity of the structure and excellent physical properties of aeroneneneba gel materials make it widely used in

building materials, aerospace, power components and energy storage, chemical industry, environmental protection and other fields. Among the many aerogel materials, oxide aerogel has been in existence for a long time, and its research technology is relatively mature. It has wide application value in the fields of heat insulation, adsorption and photocatalysis. In the future, with the in-depth research in all aspects, the preparation technology and drying technology of carbon and carbide aerogel will also make great progress. Meanwhile, the research on new carbon source channels will also increase the carbon source channels and make the carbon source cheaper. This is of great significance to the reduction of the production cost of carbon aerogel, the continuous expansion of the production scale and the acceleration of the production cycle. It will attract more scholars and experts in different fields to study it, Multi domain and multi-channel application development. At the same time, carbon aerogel will be more fully applied in the military, more in-depth and extensive research is also gradually increasing, and new aerogel materials with better performance and lower cost are also gradually developing, striving to add bricks and tiles to China's national defense cause.

References

- [1] Wu X. D, Song Z. H, Wang W (2020) Research progress of aerogel materials. *Journal of Nanjing University of Technology (Natural Science Edition)*, 42 (2): 47-49.
- [2] Zhao S, Malfait W, Demilecamps A (2015) Thermally Superinsulating Biopolymer-Silica Aerogel Hybrids by Cogelation of Silicic Acid with Pectin. *Angewandte Chemie*, 54 (48): 14282-14286.
- [3] Yang H. L, Ni W, Chen D. P, Feng J. P, Zhang S. L, Liu F. M (2008) Research on preparation of monolithic silica aerogel with nanoporous structure from water glass. *Journal of Functional Materials*, 39 (9): 1525-1527.
- [4] Tao X, Yang H. L, Li J. N, Sun C. C, Lei C. S, Hu Z. J, Zhao Y (2019) Synthesis and physicochemical characterization of silica aerogels by rapid seed growth method. *Ceramics International*, 45 (6): 7071-7076.
- [5] Yi X. B, Wang X. C, Zhang J (2014) Synthesis and characterization of SiO₂ composite aerogels enhanced by the self growing nano-fibers. *Chinese Journal of Inorganic Chemistry*, 30 (3): 603-608.
- [6] Chakraborty S, Pisal A. A, Kothari V. K (2016) Synthesis and characterization of fibre reinforced silica aerogel blankets for thermal protection. *Advances in Materials Science and Engineering*, 16: 19-27.
- [7] Xiong S. X, Yang Y, Zhang S. Z, Xiao Y. Y, Ji H, Yang Z. Y, Ding F (2021) Nanoporous polybenzoxazine aerogels for thermally insulating and self-Extinguishing materials in aerospace applications. *ACS Applied Nano Materials*, 4 (7): 7280-7288.
- [8] Noparvar-Qarebagh A, Roghani-Mamaqani H, Salami-Kalajahi M (2016) Novolac phenolic resin and graphene aerogel organic-inorganic nanohybrids: High carbon yields by resin modification and its incorporation into aerogel network. *Polymer Degradation & Stability*, 124: 1-14.
- [9] Noroozi M, Panahi-Sarmad M, Bahramian A. R (2019) Thermal insulation behavior of functionally graded aerogel: The role of novolac molecular-weight. *Polymer*, 178: 121575-121589.
- [10] Zhong Y, Shao G. F, Wu X. D (2019) Robust monolithic polymer (resorcinol-formaldehyde) reinforced alumina aerogel composites with mutually interpenetrating networks. *RSC Advances*, 9 (40): 22942-22949.
- [11] Hou X. B, Zhang R. B, Fang D. N (2020) Flexible, fatigue resistant, and heat-insulated nanofiber-assembled polyimide aerogels with multifunctionality. *Polymer Testing*, 81: 106246-106258.
- [12] Zhang X. H, Li W, Song P. Y, You B, Sun G (2020) Double-cross-linking strategy for preparing flexible, robust, and multifunctional polyimide aerogel. *Chemical Engineering Journal*, 381: 122784-122794.
- [13] Li M. M, Gan F, Dong J, Fang Y. T, Zhao X, Zhang Q. H (2021) Facile preparation of continuous and porous polyimide aerogel fibers for multifunctional applications. *ACS Applied Materials & Interfaces*, 13 (8): 10416-10427.
- [14] Wu D, Fu R (2008) Requirements of organic gels for a successful ambient pressure drying preparation of carbon aerogels. *Journal of Porous Materials*, 15 (1): 29-34.
- [15] Suo H, Wang W, Jiang S. J, Cui S, Shen X. D, Zhu X. F, Wu X. D (2019) Research Progresses on High Temperature Resistant Aerogel Insulation Materials. *Aerospace Shanghai*, 36 (6): 61-68.
- [16] Zhang Z, Zhao S, Chen G. B, Li K. F, Fei Z. F, Yang Z. C (2021) Preparation and applications of silicon carbide monolithic aerogels. *Progress in Chemistry*, 33 (9): 1511-1524.
- [17] Wang K. F (2021) Application of aerogel materials in construction industry. *Construction Materials & Decoration*, 17 (30): 48-49.
- [18] Zhang G. P, Wu H. J, Liu Y. C, Yang L. X (2021) Silica aerogel insulation materials and their application for building carbon reduction. *Inorganic Chemicals Industry*, 53 (9): 1-5.
- [19] Liu X. C (2012) Preparation and properties of carbon aerogel electrode materials for supercapacitors. *Chengdu: Xihua University*.
- [20] Liang K. H (2019) Preparation of mesoporous carbon materials and their application in supercapacitors. *Shijiazhuang: Hebei University of science and technology*.
- [21] Liu L. P, Zhou L. Z, Zhang Y. Y, Li C (2018) Preparation and application of carbon electrode materials in supercapacitors. *Yunnan Chemical Technology*, 45 (9): 191-194.
- [22] Sheng X. L, Zhu G. M, Yang P. F (2016) Advances in heat insulation material applied for aerospace. *Polymer Materials Science & Engineering*, 32 (10): 164-169.
- [23] Feng Z. H, Shi J. J, Kong L, Luo L. J, Liang X, Kuang S. L (2020) Research progress in low-density ablative materials for thermal protection system of aerospace flight vehicles. *Journal of Materials Engineering*, 48 (8): 14-24.