

# Development of Solar Photo-Fenton Process for the Removal of Color, COD, and Turbidity from Institutional Wastewater

Andualem Arka, Perumal Asaithambi\*, Seifu Kebede Debela

Department of Water Supply and Environmental Engineering, Jimma Institute of Technology, Jimma University, Jimma, Ethiopia

## Email address:

asaithambi.perumal@ju.edu.et (P. Asaithambi), drasaithambi2014@gmail.com (P. Asaithambi)

\*Corresponding author

## To cite this article:

Andualem Arka, Perumal Asaithambi, Seifu Kebede Debela. Development of Solar Photo-Fenton Process for the Removal of Color, COD, and Turbidity from Institutional Wastewater. *Journal of Energy, Environmental & Chemical Engineering*. Vol. 7, No. 2, 2022, pp. 26-35. doi: 10.11648/j.jeece.20220702.12

Received: March 19, 2022; Accepted: April 18, 2022; Published: April 26, 2022

**Abstract:** In recent years, hard research has been aimed to develop effective technology for the treatment of wastewater and industrial effluent containing organic/inorganic contaminants. Amongst several technologies, the advanced oxidation processes (AOPs) recently have played a major role in the treatment of wastewater. In this study, the treatment of institutional wastewater by solar-photo-Fenton (UV/Fe<sup>2+</sup>/H<sub>2</sub>O<sub>2</sub>) process based on AOPs was examined in terms of % color, % turbidity, and % COD removal. The solar-UV/Fe<sup>2+</sup>/H<sub>2</sub>O<sub>2</sub> process has revealed a higher removal of color (91%), turbidity (90%), and COD (86%) than the other processes. The effect of various experimental parameters such as hydrogen peroxide (H<sub>2</sub>O<sub>2</sub>) concentration (0.25 to 1.25 g/L) and Ferrous ion (Fe<sup>2+</sup>) concentration (0.005 to 0.12 g/L), initial pH (2 to 10), reaction time (30 to 180 min) on the color, turbidity and COD removal has been studied to find out the optimum conditions leading to maximum removal efficiency of the solar UV/Fe<sup>2+</sup>/H<sub>2</sub>O<sub>2</sub> process. The best results of the solar UV/Fe<sup>2+</sup>/H<sub>2</sub>O<sub>2</sub> process of institutional wastewater treatment have been found using 0.75 g/L of H<sub>2</sub>O<sub>2</sub>, 0.045 g/L of Fe<sup>2+</sup>, pH of 4, after 120 min of reaction time. The present study revealed that the solar-UV/Fe<sup>2+</sup>/H<sub>2</sub>O<sub>2</sub> process in an AOPs was well efficient in the institutional wastewater treatment, accomplishing a higher pollutant removal rate. The solar-UV/Fe<sup>2+</sup>/H<sub>2</sub>O<sub>2</sub> process is an effective treatment technique for the removal of pollutants from institutional wastewater.

**Keywords:** Institution Wastewater, Solar Photo-Fenton Process, Color, Turbidity, COD Removal, Operating Parameters, Optimization

## 1. Introduction






Water is vital to survival on earth; it is one of the important requirements in human life. Increasing water demand from the world population has become a major global concern [1]. It is essential that wastewater management be considered as part of an integrated, full life cycle, an ecosystem-based management system that operates across all three dimensions of sustainable development (social, economic, and environmental), geographical borders, and includes both freshwater and marine waters [2]. Despite wastewater reuse being able to provide important economic benefits by reducing wastewater disposal and irrigation costs, some public health and environmental concerns must be addressed

for the safe and rational implementation of wastewater reuse in an agricultural setting [3].

The advanced oxidation processes (AOPs) could be promising for the degradation of persistent contaminants which are not removed during a biological process. The high efficiency of AOPs is associated with the generation of highly reactive •OH radicals, which can oxidize many organic compounds. Eventually, complete mineralization to CO<sub>2</sub>, H<sub>2</sub>O, and mineral compounds can be obtained. The most extensively studied AOPs are the solar photo-Fenton (UV/Fe<sup>2+</sup>/H<sub>2</sub>O<sub>2</sub>) process [4–6], photocatalysis [7, 8], UV/H<sub>2</sub>O<sub>2</sub> [9, 10], and others [11].

In recent years, the Fenton reaction has been widely applied in the field of environmental remediation, especially

for the decontamination of wastewaters containing chemically and biologically recalcitrant organic pollutants [12]. Various organic pollutants could be attacked non-selectively by  $\bullet\text{OH}$  and decomposed to  $\text{CO}_2$ ,  $\text{H}_2\text{O}$ , and inorganic ions [13, 14]. The  $\text{UV/Fe}^{2+}/\text{H}_2\text{O}_2$  process involves sunlight or artificial light irradiation, which increases the rate of contaminants degradation by increasing the production of  $\bullet\text{OH}$  from hydrogen peroxide ( $\text{H}_2\text{O}_2$ ) decomposition and synchronously accelerating the reduction of  $\text{Fe}^{3+}$  to  $\text{Fe}^{2+}$ . Moreover, the photolysis of  $\text{H}_2\text{O}_2$  also plays an important role in the photo-Fenton process to break the O–O bond for the production of  $\bullet\text{OH}$  [15, 16].



In the last few decades, using the Fenton oxidation process for the treatment of institutional wastewater has been widely reported. However, the Fenton reaction has some limitations in practical application, such as the requirement for a large number of chemical reagents, large production of ferric hydroxide sludge, and very slow catalysis of the ferrous ions generation [17]. Direct photolysis of  $\text{H}_2\text{O}_2$  produces  $\bullet\text{OH}$  which can be used for the degradation of organic compounds, and in turn, increases the rate of degradation of organic pollutants [18]. Conventional biological processes are usually the most cost-effective alternatives for treating these effluents, but it is widely known that high concentrations of toxic or non-biodegradable compounds prevent mineralization [19]. Moreover, 12 h are required to achieve chemical oxygen demand (COD) removal efficiencies higher than 90% [20].

Advanced oxidation processes (AOPs) are an efficient alternative that could be used to solve this problem. Among AOPs, the ferrioxalate-induced solar-UV/ $\text{Fe}^{2+}/\text{H}_2\text{O}_2$  process is a clean technology that is considered environmentally friendly and competitive at the industrial scale [21]. The AOPs have been demonstrated to be innovative suitable technologies to reduce organic load or toxicity and enhance the treatability of wastewater because they can oxidize refractory organic compounds into harmless substances and even lead to mineralization end-products [22].

The solar-UV/ $\text{Fe}^{2+}/\text{H}_2\text{O}_2$  process is a clean technology that is considered environmentally friendly and competitive at any wastewater treatment [21]. Over the last years, the solar-UV/ $\text{Fe}^{2+}/\text{H}_2\text{O}_2$  process became one of the most interesting alternative processes for wastewater treatment, given its simplicity and feasible application [23]. Besides the

enhancement of the photo-Fenton process for wastewater treatment using natural products and solar radiation, another important factor worthy of consideration is the iron source. Up to date, different iron materials have been tested as precursors of the photo-Fenton process, including natural iron oxide [24], residue-based iron [24], zero-valent metallic iron [25], magnetic composites [26], or modified clays and carbon-based materials [27] to promote organic pollutant degradation. However, among the iron species, special attention is associated with the ferric ion, given that in natural conditions,  $\text{Fe}^{2+}$  is oxidized to  $\text{Fe}^{3+}$  by oxygen or  $\text{H}_2\text{O}_2$ , increasing the investigative interest for ferric sources.

The physical, chemical, and biological technologies have been widely used to treat wastewater. However, most of the real wastewater contains many organic pollutants with high toxicity and low biodegradability [28]. Over the last years, the solar-UV/ $\text{Fe}^{2+}/\text{H}_2\text{O}_2$  process became one of the most interesting alternative processes for wastewater treatment, given its simplicity and feasible application [23, 29–31]. Since solar energy is a widely accessible energy source its application in processes beyond the generation of current or process heat will give a benefit the sustainability of a wide range of industrial techniques. The detoxification of wastewater by different solar photocatalytic systems is extensive work in the research field [32]. So, this research study was focused on the removal of pollutants in terms of color, turbidity, and COD removal and also studied various operating parameters based on the photo AOPs for the institutional wastewater.

The goal of this research work is to investigate the treatment performance of the solar-UV/ $\text{Fe}^{2+}/\text{H}_2\text{O}_2$  process using different operating parameters in removing pollutants from institutional wastewater. Evaluating the operating variables such as  $\text{H}_2\text{O}_2$  and  $\text{Fe}^{2+}$  dosages, pH, and reaction time on the removal efficiencies of color, turbidity, and COD by using the solar photo Fenton method.

## 2. Material and Methods

### 2.1. Characterization

The wastewater sample for this study was taken from Jimma Institute of Technology (JIT), Jimma University (JU), Jimma, Ethiopia. The sampling method had been a random sampling technique. Samples were collected in plastic bottles having 20 L volume. The wastewater sample was taken by inserting the plastic bottle to a certain depth of the wastewater at different positions. Then the sample collected was merged to form a composite sample represented in Figure 1. The experimental tests of the sample were conducted in JIT, JU, environmental engineering laboratory to analyze its characteristics wastewater and it was given in Table 1. Chemicals used in this study were Potassium dichromate, concentrated sulfuric acid, ferrous ammonium sulfate (FAS), Mercuric sulfate, Silver sulfate, Ferron indicator, and organic free distilled water, Sodium hydroxide, Diluted sulfuric acid, ferrous iron, and hydrogen peroxide.



Figure 1. Institutional wastewater collection.

## 2.2. Methods

The experimental setup of the solar-UV/Fe<sup>2+</sup>/H<sub>2</sub>O<sub>2</sub> process is shown in Figure 2. The solar-UV/Fe<sup>2+</sup>/H<sub>2</sub>O<sub>2</sub> process degradation of experiments was carried out in a 500 mL

beaker under natural solar irradiation, outside the laboratory of environmental engineering, JiT, JU by the mixture of H<sub>2</sub>O<sub>2</sub>, Fe<sup>2+</sup> and adjusting to different pH with 500 mL sample. The experiment was repeated for thirty runs. The working volume of the beaker was 500 mL. The Fe concentration used in all solar-UV/Fe<sup>2+</sup>/H<sub>2</sub>O<sub>2</sub> experiments was 0.005 to 0.12 g/L. The H<sub>2</sub>O<sub>2</sub> concentration used in all solar-UV/Fe<sup>2+</sup>/H<sub>2</sub>O<sub>2</sub> experiments was 0.25 to 1.25 g/L. The reaction time interval used in all solar-UV/Fe<sup>2+</sup>/H<sub>2</sub>O<sub>2</sub> experiments was 30 to 80 min. The pH was adjusted at the beginning of each run to the range from 2 to 10. All pH adjustments were done with analytical grade NaOH and H<sub>2</sub>SO<sub>4</sub>. The pH range used in all experiments was 2 to 10. During the solar-photo-Fenton treatment, the wastewater was exposed to solar light for different duration of time.

The COD concentration in the wastewater sample was measured by the closed reflux method. The color absorbance in wastewater was measured with UV/Vis-spectrophotometer 6700 (Bibby scientific Ltd). The turbidity of the wastewater sample and treated water was measured by a microprocessor turbidity meter (HI 93703). Dissolved oxygen was measured dissolved oxygen meter (9500 DO<sub>2</sub> meter). The pH was measured by a pH meter (pH 3310). Oakton waterproof portable meter kit also measured pH, ORP, ION, conductivity, TDS, salinity, resistivity, DO, and temperature.

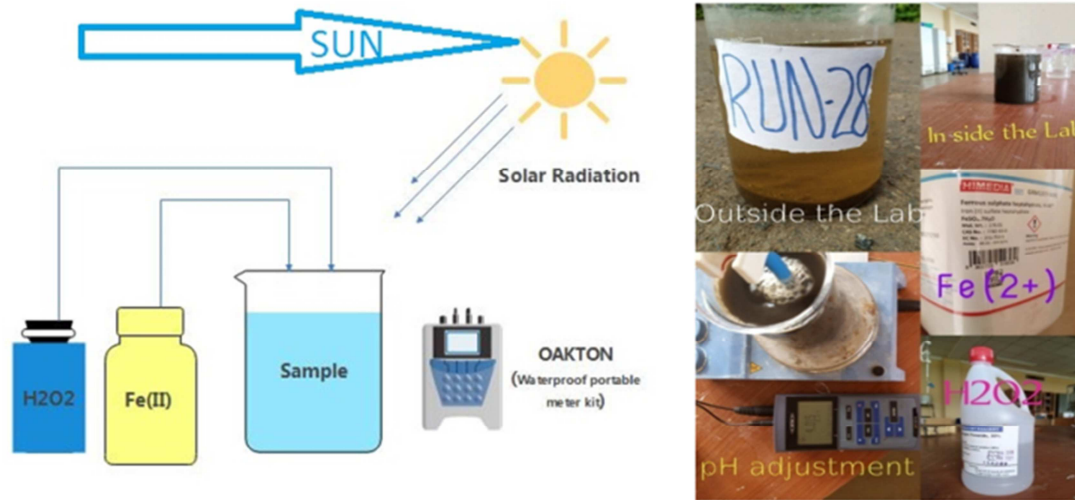


Figure 2. Experimental setup of solar photo Fenton process.

## 2.3. Analysis

The efficiency of color, turbidity and COD removal was calculated using the following equation is given below.

### 2.3.1. Color Removal, (%)

$$\text{Color removal, (\%)} = \frac{Abs_i - Abs_t}{Abs_i} * 100 \quad (9)$$

Where,

$Abs_i$  and  $Abs_t$  are the absorbance of initial and at any time  $t$  samples for the corresponding wavelength  $\lambda_{max}$ .

### 2.3.2. COD Removal, (%)

$$\text{COD removal, (\%)} = \frac{COD_i - COD_t}{COD_i} * 100 \quad (10)$$

Where,

$COD_i$  and  $COD_t$  (in ppm) are the chemical oxygen demand of initial and at reaction time  $t$ , respectively.

### 2.3.3. Turbidity Removal, (%)

$$\text{Turbidity removal, \%} = \frac{\text{Turbidity (initial)} - \text{Turbidity (final)}}{\text{Turbidity (initial)}} * 100 \quad (11)$$

### 3. Results and Discussion

#### 3.1. Various AOPs Comparison

The operational parameters such as  $\text{Fe}^{2+}$  – 0.045 g/L,  $\text{H}_2\text{O}_2$  – 0.75 g/L, COD – 296 mg/L, pH – 4, and reaction time – 120 min were applied in of  $\text{H}_2\text{O}_2$ ,  $\text{Fe}^{2+}$ ,  $\text{Fe}^{2+}/\text{H}_2\text{O}_2$ , and solar-UV/ $\text{Fe}^{2+}/\text{H}_2\text{O}_2$  processes to compare their efficiency in terms of % color, % turbidity, % COD removal from the institution wastewater and the results are given in Figure 3. It is evident from Figure 3, the single  $\text{H}_2\text{O}_2$  and  $\text{Fe}^{2+}$  processes were not effective for the removal of color (30% & 22%), turbidity (29% & 21%) and COD (25% & 18%). Moderately low color (60%), turbidity (55%), and COD (45%) removal were observed for the  $\text{Fe}^{2+}/\text{H}_2\text{O}_2$  processes. The combination of solar UV with  $\text{Fe}^{2+}/\text{H}_2\text{O}_2$  such as solar-UV/ $\text{Fe}^{2+}/\text{H}_2\text{O}_2$  processes for the removal of color, turbidity, and COD were about 91%, 90%, and 86%, respectively. As expected, the hybrid solar-UV/ $\text{Fe}^{2+}/\text{H}_2\text{O}_2$  process has the best % color, %

turbidity, and % COD removal efficiency within the investigated solar UV with AOPs. The above results indicated that introducing  $\text{H}_2\text{O}_2$ ,  $\text{Fe}^{2+}$  and into the solar UV system led to a significant increase in the color, turbidity, and COD removals. This could be attributed to the available parallel pathways to generate abundant  $\bullet\text{OH}$  radicals for efficient color, turbidity, and COD removals from institution wastewater within a shorter reaction time [33, 34]. Further studies were focused on the solar-UV/ $\text{Fe}^{2+}/\text{H}_2\text{O}_2$  process for removal of % color, % turbidity, and % COD from institution wastewater.

#### 3.2. Effect Operating Parameters

The solar UV/ $\text{Fe}^{2+}/\text{H}_2\text{O}_2$  processes are affected by several operating parameters such as  $\text{H}_2\text{O}_2$  (0.25 to 1.25 g/L) and  $\text{Fe}^{2+}$  (0.005 to 0.12 g/L) concentration, solution pH (2 to 10), and reaction time (30 to 180 min) was studied in terms of % COD, % color and % turbidity removal and the results and discussion was given below.

**Table 1.** Characteristics of institutional wastewater.

No	Parameters	Range of concentrations in institutional wastewater
1	COD	1296 mg/L
2	pH	6.54
3	Conductivity	2.508 $\mu\text{S}/\text{cm}$
4	TDS	1358 mg/L
5	DO	46 mg/L
6	Turbidity	89.65 NTU
7	Temperature	20.9°C
8	Odor	Objectionable
9	Color	Slightly brown

**Table 2.** Overview of work done in the area of solar photo-Fenton application in recent years.

No	Process	Type of wastewater	Parameters	Maximum removal Efficiency (%)	References
1	UV/ $\text{H}_2\text{O}_2/\text{Fe}^{2+}$	Textile	Color	91.92%	[37]
2	UV/ $\text{H}_2\text{O}_2/\text{Fe}^{2+}$	Winery	COD	70 $\pm$ 3.3%	[38]
3	UV/ $\text{H}_2\text{O}_2/\text{Fe}^{2+}$	Citrus	Color	77%	[39]
4	$\text{Fe}^{2+}/\text{H}_2\text{O}_2$	Colored	COD	53%	[40]
5	UV/ $\text{H}_2\text{O}_2/\text{Fe}^{2+}$	Municipal	Color	95%	[41]
6	UV/ $\text{Fe}^{2+}/\text{H}_2\text{O}_2$	Industrial	COD	50%	[42]
7	UV/ $\text{Fe}^{2+}/\text{H}_2\text{O}_2$	Wastewater	Color	84.40%	[43]
8	UV/ $\text{Fe}^{2+}/\text{H}_2\text{O}_2$	Colored soft drink	COD	96.50%	[44]
9	UV/ $\text{Fe}^{2+}/\text{H}_2\text{O}_2$	Petroleum	COD	90%	[45]
10	Solar UV/ $\text{Fe}^{2+}/\text{H}_2\text{O}_2$	Institution	Color	74.7%	[45]
			Turbidity	91%	
			COD	90%	This study
				86%	



##### 3.2.1. The Effect of Reaction Time

Solar radiation is the main factor that influences degradation during the different time intervals of exposed solution due to the generation of  $\bullet\text{OH}$  radicals. The influence of reaction time on the removal of % color, % turbidity, and % COD from institutional wastewater using solar-UV/ $\text{Fe}^{2+}/\text{H}_2\text{O}_2$  process with  $\text{H}_2\text{O}_2$  – 0.75 g/L,  $\text{Fe}^{2+}$  – 0.045 g/L, solution pH-4, and reaction time-120 min the results are depicted in the Figure 4. The results indicate that the % color, % turbidity, and % COD removal have increased with an increase in treatment time. The color, turbidity, and COD

removed are proportional to the generation of  $\bullet\text{OH}$  radicals by the solar UV/ $\text{Fe}^{2+}/\text{H}_2\text{O}_2$ . When the treatment time increases, a constant amount of  $\bullet\text{OH}$  radicals are produced. Consequently, an increase in the treatment time increases the color, turbidity, and COD removal efficiency.

The regeneration of  $\text{Fe}^{2+}$  from photoreduction of  $\text{Fe}^{3+}$  by solar radiation increases the decolorization/degradation of pollutants from wastewater. In the presence of sufficient  $\text{H}_2\text{O}_2$  and Fe concentrations, the exposure to solar radiation increases the amount of degradation in wastewater due to the continuous regeneration of  $\text{Fe}^{2+}$  from the photo-reduction of


$\text{Fe}^{3+}$  by solar light (according to equations 12 and 13) and the generation of extra free radicals (mainly  $\bullet\text{OH}$ ) due to ferrioxalate ( $\text{Fe}^{3+}(\text{OH})^{2+}$ ) photochemistry as commented in the following section.



### 3.2.2. The Effect of $\text{H}_2\text{O}_2$

The dosing rate of  $\text{H}_2\text{O}_2$  is considered to be one of the most important factors which should be considered in the solar UV/ $\text{Fe}^{2+}/\text{H}_2\text{O}_2$  process. It was found that color, turbidity, and COD removal efficiency increase with increasing the dosing rate of  $\text{H}_2\text{O}_2$  from 0.25 to 1.25 g/L. The result was shown in Figure 5. The highest percentage removal of COD was attained at a time of 120 min,  $\text{Fe}^{2+}$  concentration of 0.045 g/L, and initial effluent pH of 4 when using an  $\text{H}_2\text{O}_2$  dosing rate of 0.750 g/L, so further addition of  $\text{H}_2\text{O}_2$  is not necessary. Excessive  $\text{H}_2\text{O}_2$  reacts

with  $\bullet\text{OH}$  (equation (14)) competing with organic pollutants and consequently reducing treatment efficiency. Excessive  $\text{H}_2\text{O}_2$  may cause an unutilized  $\bullet\text{OH}$  radical.



The  $\text{H}_2\text{O}_2$  is the main source of  $\bullet\text{OH}$  in the solar UV/ $\text{Fe}^{2+}/\text{H}_2\text{O}_2$  process.  $\text{H}_2\text{O}_2$  is an oxidant widely used for water treatment due to its oxidation potential of around 1.4 V at near-neutral pH [35]. Moreover, it is cheap, safe, easy to handle, and does not generate residues as it easily decomposes to  $\text{H}_2\text{O}$  and  $\text{O}_2$ .  $\text{H}_2\text{O}_2$  alone (even at non-toxic microbial concentration, lower than 0.050 g/L) in combination with natural sunlight can promote very high microbial inactivation rates. To find out the optimum condition in solar photo  $\text{Fe}^{2+}/\text{H}_2\text{O}_2$  reaction different dosages of  $\text{H}_2\text{O}_2$  were added to the solution. All experiments were exposed to different duration of solar radiation.

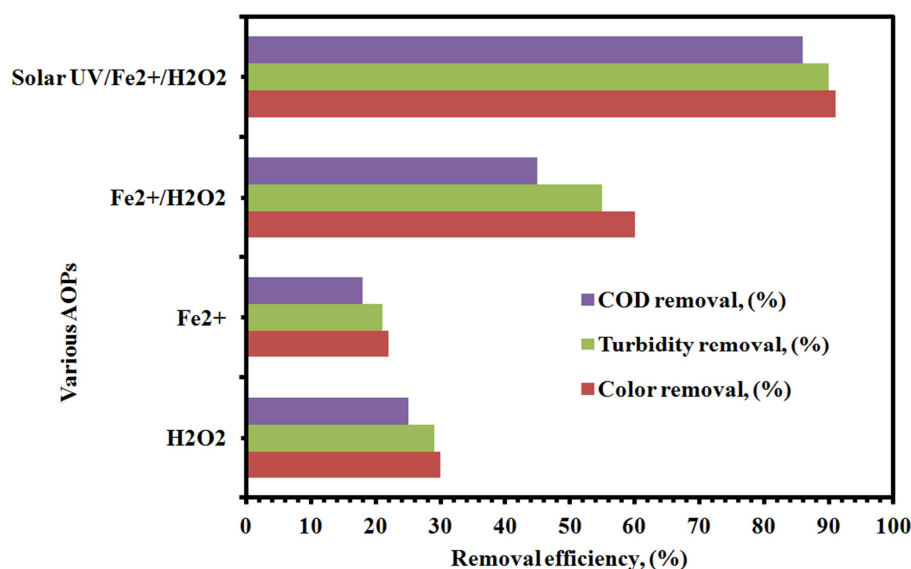


Figure 3. Comparisons of various AOPs on removal efficiency of % color, turbidity, and COD.

### 3.2.3. Effect of $\text{Fe}^{2+}$

The amount of  $\text{Fe}^{2+}$  ion is one of the main parameters which influence the solar-UV/ $\text{Fe}^{2+}/\text{H}_2\text{O}_2$  processes. In this study, to obtain the optimal initial  $\text{Fe}^{2+}$  concentration, the investigation was carried out in the range of 0.005-0.12 g/L  $\text{Fe}^{2+}$ , at different pH, solar radiation, and  $\text{H}_2\text{O}_2$  concentration. The result was shown in Figure 6. The Ferrous Sulphate Heptahydrate ( $\text{FeSO}_4 \cdot 7\text{H}_2\text{O}$ ) was introduced into the solution at start-up. The solutions were continuously stirred using a magnetic stirrer. This is because increasing  $\text{Fe}^{2+}$  produces more quantity of  $\bullet\text{OH}$  radical with solar radiation. This  $\bullet\text{OH}$  radical enhances the oxidation of pollutants and the removal of color, turbidity, and COD. It can be seen that the removal rate of color, turbidity, and COD increased with the increasing amount of  $\text{Fe}^{2+}$  in the range of 0.005 to 0.045 g/L. It was known that  $\text{Fe}^{2+}$  had a catalytic decomposition effect on  $\text{H}_2\text{O}_2$ . When

the  $\text{Fe}^{2+}$  concentration increased, the catalytic effect increased accordingly. However, for  $\text{Fe}^{2+}$  doses higher than 0.045g/L, the color, turbidity, and COD percent removal decreased slightly. This decrease was essentially due to the competitive consumption of  $\bullet\text{OH}$  radicals. The amounts of  $\text{Fe}^{2+}$  ions should be as low as possible for economic and environmental reasons; high amounts of  $\text{Fe}^{2+}$  ions might produce a larger quantity of  $\text{Fe}^{3+}$  sludge. The removal/treatment of the sludge containing  $\text{Fe}^{3+}$  at the end of the wastewater treatment is expensive and requires a large number of chemicals and manpower. As shown in the inset of Figure 6, 0.045 g/L  $\text{Fe}^{2+}$  can be used as an optimum dosage in this study. Solar radiation was used as an alternative to tackle this problem in the degradation of pollutants and molecules.  $\text{Fe}^{2+}$  has relatively high solubility under acidic or neutral conditions and can be oxidized easily into  $\text{Fe}^{3+}$  by dissolved oxygen in water [36].

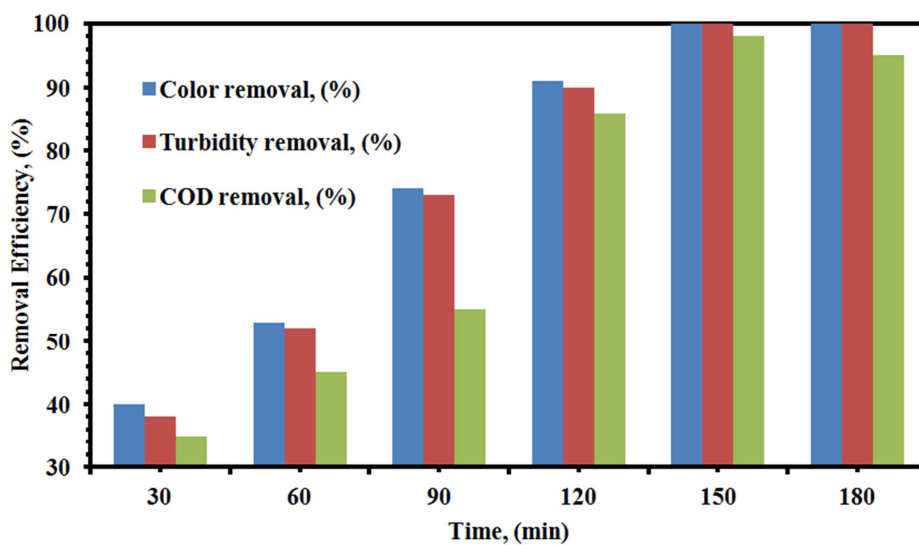


Figure 4. Effect of reaction time on removal efficiency of % color, turbidity, and COD.

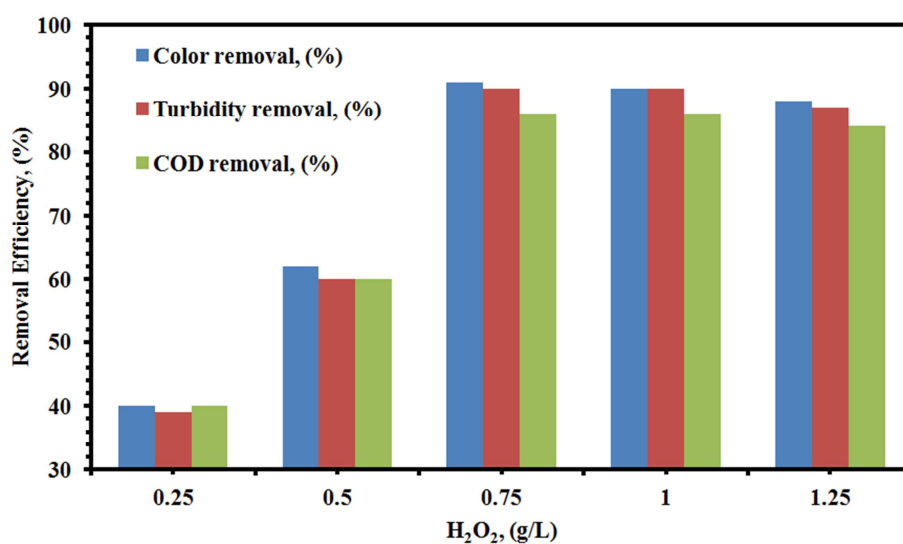


Figure 5. Effect of  $H_2O_2$  on removal efficiency of % color, turbidity, and COD.

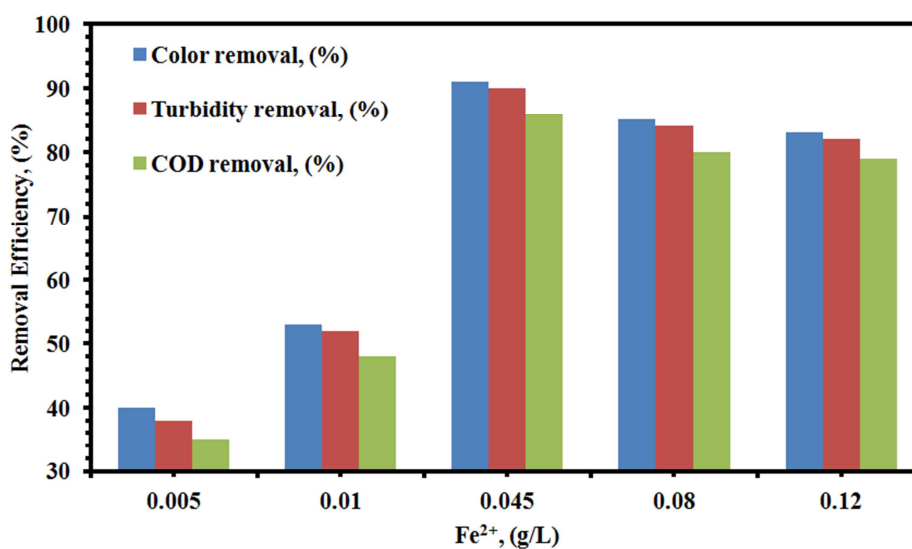


Figure 6. Effect of  $Fe^{2+}$  on removal efficiency of % color, turbidity, and COD.



### 3.2.4. Effect of pH

Solution pH is an important operating parameter that can influence the solar-UV/Fe<sup>2+</sup>/H<sub>2</sub>O<sub>2</sub> process. The solar UV/Fe<sup>2+</sup>/H<sub>2</sub>O<sub>2</sub> reaction was strongly pH-dependent. The pH value influences the generation of •OH radicals and the removal efficiency. To study the effects of effluent pH on the treatment efficiency, the initial pH of the wastewater was

adjusted to between 2 and 10. The removal efficiency color, turbidity, and COD as a function of initial pH were presented in Figure 7. When the initial pH was changed from 2 to 4, the % color, % turbidity, and % COD removal efficiencies increased. However, when the initial pH was changed from 4 to 10, the removal efficiencies decreased.

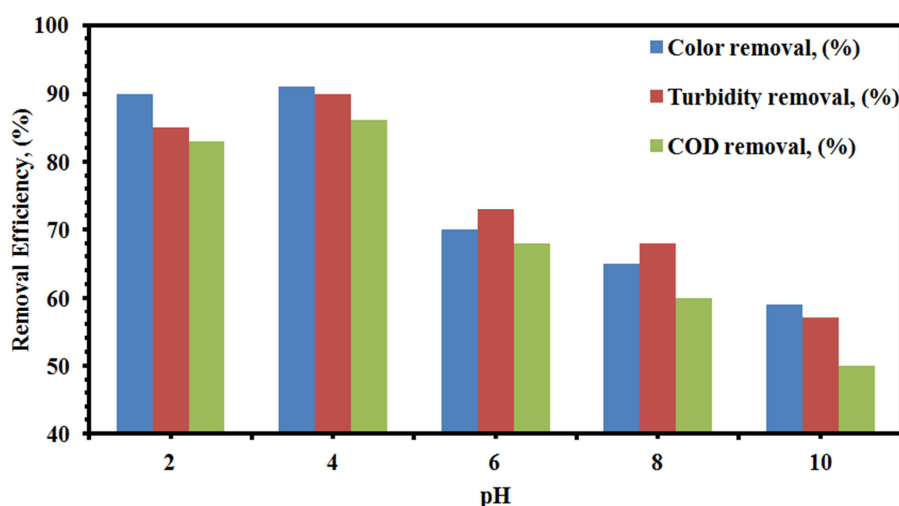


Figure 7. Effect of pH on removal efficiency of % color, turbidity, and COD.

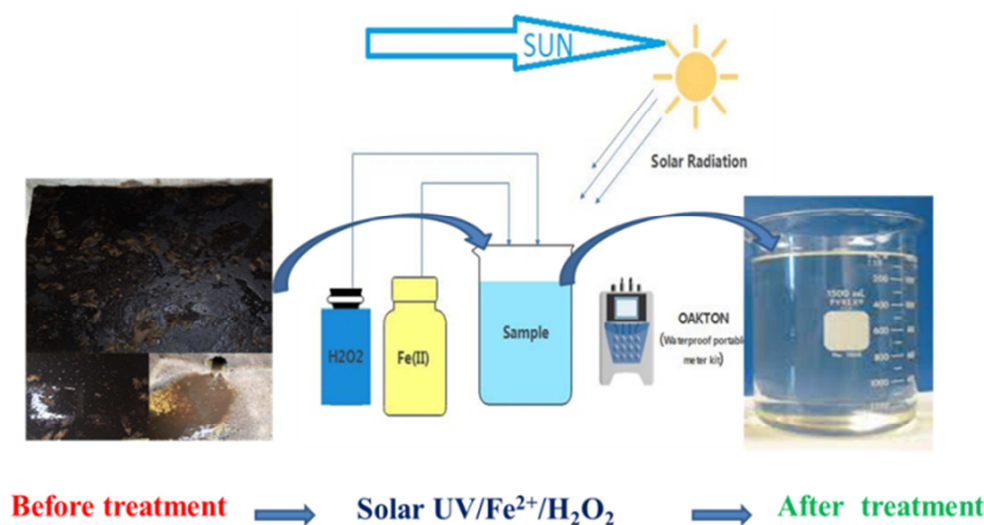


Figure 8. Color removal before and after treatment of wastewater.

The optimum pH was found to be about 4, it can be seen that the removal rate of color, turbidity, and COD was increased with the pH in the range of 2 to 4 and decreased from 4 to 10. The degradation decreased at pH values higher than 4 because iron precipitated as hydroxide. Additionally, the oxidation potential of the •OH radical was known to decrease with increasing pH. Another reason for the inefficient degradation at pH > 4 is the dissociation and auto-decomposition of H<sub>2</sub>O<sub>2</sub>. For pH values below 2.5, the reaction of H<sub>2</sub>O<sub>2</sub> with Fe<sup>2+</sup> is seriously affected causing the reduction in •OH radical production, due to •OH radical scavenging by H<sup>+</sup> ions.

Figure 8, shows the color removal of wastewater before and after treatment using the solar-UV/Fe<sup>2+</sup>/H<sub>2</sub>O<sub>2</sub> process. From Figure 8, it is observed that complete color removal is achieved within the process of time.

## 4. Conclusions

From this research study, the following conclusions were drawn. The solar-UV/Fe<sup>2+</sup>/H<sub>2</sub>O<sub>2</sub> process for the treatment of institution wastewater was successfully carried out in terms of % color, % turbidity, and % COD removal. The results showed that the solar-UV/Fe<sup>2+</sup>/H<sub>2</sub>O<sub>2</sub> process was more

effective than the listed other AOPs. The effects of various operating parameters such as  $\text{H}_2\text{O}_2$ ,  $\text{Fe}^{2+}$ , initial effluent pH, and reaction time by the solar-UV/ $\text{Fe}^{2+}/\text{H}_2\text{O}_2$  process were studied using institution wastewater. The solar-UV/ $\text{Fe}^{2+}/\text{H}_2\text{O}_2$  process was optimized to maximize pollutant removal of institutional wastewater. The maximum color, turbidity, and COD removal of 91%, 90%, and 86%, respectively were observed at the  $\text{H}_2\text{O}_2$  of 0.75 g/L, initial effluent pH of 4, and  $\text{Fe}^{2+}$  of 0.045 g/L, and reaction time of 120 min. The results of this study indicated that the solar UV/ $\text{Fe}^{2+}/\text{H}_2\text{O}_2$  was a practical method to treat institutional wastewaters and allowing achieved higher removal of color, turbidity, and COD. The solar UV/ $\text{Fe}^{2+}/\text{H}_2\text{O}_2$  process described in this study was suitable to be applied for the treatment of institutional wastewater as it has higher treatment efficiency.

## Declarations

### Data Availability Statement

Data will be made available on request.

### Conflicts of Interest

The authors declare no conflicts of interest regarding the publication of this paper.

## Research Highlights

A combination of solar UV,  $\text{Fe}^{2+}$ , and  $\text{H}_2\text{O}_2$  for wastewater treatment developed.

Solar-UV/ $\text{Fe}^{2+}/\text{H}_2\text{O}_2$  highly successful for removal of pollutant than other processes.

Maximum pollutant efficiencies were obtained using solar UV/ $\text{Fe}^{2+}/\text{H}_2\text{O}_2$ .

Operating parameters studied to obtain the process performance efficiency.

## References

- [1] Machulek A, H. F, Gozzi F, et al (2012) Fundamental Mechanistic Studies of the Photo-Fenton Reaction for the Degradation of Organic Pollutants. *Org Pollut Ten Years After Stock Conv - Environ Anal Updat*. <https://doi.org/10.5772/30995>
- [2] Roy A, Das BK, Bhattacharya J (2011) Development and Validation of a Spectrophotometric Method to Measure Sulfate Concentrations in Mine Water without Interference.
- [3] Jeong H, Adamowski J (2016) A system dynamics based socio-hydrological model for agricultural wastewater reuse at the watershed scale. *Agric Water Manag* 171: 89–107. <https://doi.org/10.1016/j.agwat.2016.03.019>
- [4] Rubio D, Nebot E, Casanueva JF, Pulgarin C (2013) Comparative effect of simulated solar light, UV, UV/ $\text{H}_2\text{O}_2$  and photo-Fenton treatment (UV-Vis/ $\text{H}_2\text{O}_2/\text{Fe}^{2+/3+}$ ) in the *Escherichia coli* inactivation in artificial seawater. *Water Res* 47: 6367–6379. <https://doi.org/https://doi.org/10.1016/j.watres.2013.08.006>
- [5] Ortega-Gómez E, Ballesteros Martín MM, Carratalà A, et al (2015) Principal parameters affecting virus inactivation by the solar photo-Fenton process at neutral pH and  $\mu\text{M}$  concentrations of  $\text{H}_2\text{O}_2$  and  $\text{Fe}^{2+/3+}$ . *Appl Catal B Environ* 174–175: 95–402. <https://doi.org/https://doi.org/10.1016/j.apcatb.2015.03.016>
- [6] Gomes Júnior O, Batista LL, Ueira-Vieira C, et al (2020) Degradation mechanism of fipronil and its transformation products, matrix effects and toxicity during the solar/photo-Fenton process using ferric citrate complex. *J Environ Manage* 269: 110756. <https://doi.org/https://doi.org/10.1016/j.jenvman.2020.110756>
- [7] Das A, Adak MK, Mahata N, Biswas B (2021) Wastewater treatment with the advent of  $\text{TiO}_2$  endowed photocatalysts and their reaction kinetics with scavenger effect. *J Mol Liq* 338: 116479. <https://doi.org/https://doi.org/10.1016/j.molliq.2021.116479>
- [8] Fu Z, Zhao X, Zhang S, Fu Z (2021) Preparation of nano- $\text{Zn}_2\text{GeO}_4/\text{rGO}$  composite photocatalyst and its treatment of synthetic dye wastewater. *Mater Chem Phys* 259: 124004. <https://doi.org/https://doi.org/10.1016/j.matchemphys.2020.124004>
- [9] Lee W, Marcotullio S, Yeom H, et al (2022) Reaction kinetics and degradation efficiency of halogenated methylparabens during ozonation and UV/ $\text{H}_2\text{O}_2$  treatment of drinking water and wastewater effluent. *J Hazard Mater* 427: 127878. <https://doi.org/https://doi.org/10.1016/j.jhazmat.2021.127878>
- [10] Mir-Tutusa JA, Jaén-Gil A, Barceló D, et al (2021) Prospects on coupling UV/ $\text{H}_2\text{O}_2$  with activated sludge or a fungal treatment for the removal of pharmaceutically active compounds in real hospital wastewater. *Sci Total Environ* 773: 145374. <https://doi.org/https://doi.org/10.1016/j.scitotenv.2021.145374>
- [11] Belén A, García E, Szyma K, Mozia S (2021) Treatment of laundry wastewater by solar photo-Fenton process at pilot plant scale. 8576–8584.
- [12] Steter JR, Brillas E, Sirés I (2017) Solar photoelectro-Fenton treatment of a mixture of parabens spiked into secondary treated wastewater effluent at low input current Juliana R. Steter, Enric Brillas, Ignasi Sirés Paper submitted to be published in *Applied Catalysis B: Environmental*. "Applied Catal B, Environ. <https://doi.org/10.1016/j.apcatb.2017.10.060>
- [13] White T, Han Y (2016) *Jacs* 2013 135 16058-16061.
- [14] Liu X, Zhou Y, Zhang J, et al (2018) Insight into electro-Fenton and photo-Fenton for the degradation of antibiotics: Mechanism study and research gaps. *Chem Eng J*. <https://doi.org/10.1016/j.cej.2018.04.142>
- [15] Clarizia L, Russo D, Somma I Di, et al (2017) Homogeneous photo-Fenton processes at near neutral pH: a review. "Applied Catal B, Environ. <https://doi.org/10.1016/j.apcatb.2017.03.011>
- [16] Giannakis S (2019) *Applied Catalysis B: Environmental A review of the concepts, recent advances and niche applications of the (photo) Fenton process, beyond water / wastewater treatment: Surface functionalization, biomass treatment, combatting cancer and other medic*. *Appl Catal B Environ* 248: 309–319. <https://doi.org/10.1016/j.apcatb.2019.02.025>



- [17] Sun J, Li X, Feng J, Tian X (2009) Oxone /  $\text{Co}_2\text{D}$  oxidation as an advanced oxidation process: Comparison with traditional Fenton oxidation for treatment of landfill leachate. *Water Res* 43: 4363–4369. <https://doi.org/10.1016/j.watres.2009.06.043>
- [18] Zuot Y (1992) Formation of Hydrogen Peroxide and Depletion of Oxalic Acid in Atmospheric Water by Photolysis of Iron (I. 26: 1014–1022).
- [19] Trovo AG (2005) Influence of the iron source on the solar photo-Fenton degradation of different classes of organic compounds. 79: 384–392. <https://doi.org/10.1016/j.solener.2005.02.019>
- [20] Ozbas EE, Tufekci N, Yilmaz G, Ovez S (2006) Aerobic and anaerobic treatment of fruit juice industry effluents. 65: 830–837.
- [21] Monteagudo JM, Carnicer A, Martí IS, et al (2012) Solar Energy Materials & Solar Cells Solar photodegradation of synthetic apple juice wastewater: Process optimization and operational cost study. 107: 307–315. <https://doi.org/10.1016/j.solmat.2012.07.001>
- [22] Xu M, Wu C, Zhou Y We are IntechOpen, the world ' s leading publisher of Open Access books Built by scientists, for scientists TOP 1% Advancements in the Fenton Process for Wastewater Treatment.
- [23] Cruz N De, Esquius L, Grandjean D, et al (2013) Degradation of emergent contaminants by UV, UV /  $\text{H}_2\text{O}_2$  and neutral photo-Fenton at pilot scale in a domestic wastewater treatment plant. 7: 0–9. <https://doi.org/10.1016/j.watres.2013.07.005>
- [24] Mechakra H, Sehili T, Kribeche MA, et al (2016) Journal of Photochemistry and Photobiology A: Chemistry Use of natural iron oxide as heterogeneous catalyst in photo-Fenton-like oxidation of chlorophenylurea herbicide in aqueous solution: Reaction monitoring and degradation pathways. 317: 140–150.
- [25] Dias FF, Oliveira AAS, Arcanjo AP, et al (2016) Applied Catalysis B: Environmental Residue-based iron catalyst for the degradation of textile dye via heterogeneous photo-Fenton. "Applied Catal B, Environ 186: 136–142. <https://doi.org/10.1016/j.apcatb.2015.12.049>
- [26] Devi LG, Srinivas M, Arunakumari ML (2016) Journal of Water Process Engineering Heterogeneous advanced photo-Fenton process using peroxymonosulfate and peroxydisulfate in presence of zero valent metallic iron: A comparative study with hydrogen peroxide photo-Fenton process. *J Water Process Eng* 13: 117–126. <https://doi.org/10.1016/j.jwpe.2016.08.004>
- [27] Chai F, Li K, Song C, Guo X (2016) Journal of Colloid and Interface Science Synthesis of magnetic porous  $\text{Fe}_3\text{O}_4$  / C /  $\text{Cu}_2\text{O}$  composite as an excellent photo-Fenton catalyst under neutral condition. *J Colloid Interface Sci* 475: 119–125. <https://doi.org/10.1016/j.jcis.2016.04.047>
- [28] Patients S, in Solid Cancer PC, Hassan BAR, et al (2012) We are IntechOpen, the world ' s leading publisher of Open Access books Built by scientists, for scientists TOP 1%. Intech 13.
- [29] Li Y, Cheng H (2021) Chemical kinetic modeling of organic pollutant degradation in Fenton and solar photo-Fenton processes. *J Taiwan Inst Chem Eng* 123: 175–184. <https://doi.org/https://doi.org/10.1016/j.jtice.2021.05.011>
- [30] Rodríguez M, Bussi J, Andrea De León M (2021) Application of pillared raw clay-base catalysts and natural solar radiation for water decontamination by the photo-Fenton process. *Sep Purif Technol* 259: 118167. <https://doi.org/https://doi.org/10.1016/j.seppur.2020.118167>
- [31] Guo Q, Zhu W, Yang D, et al (2021) A green solar photo-Fenton process for the degradation of carbamazepine using natural pyrite and organic acid with in-situ generated  $\text{H}_2\text{O}_2$ . *Sci Total Environ* 784: 147187. <https://doi.org/https://doi.org/10.1016/j.scitotenv.2021.147187>
- [32] Eduardo A, Padovani T, Rodrigues D, et al (2004) Solar photo-Fenton treatment of chip board production waste water. 77: 583–589. <https://doi.org/10.1016/j.solener.2004.03.024>
- [33] Asaithambi P, Sajjadi B, Aziz ARA (2017) Integrated ozone-photo-Fenton process for the removal of pollutant from industrial wastewater. *Chinese J Chem Eng* 25: 516–522. <https://doi.org/10.1016/j.cjche.2016.10.005>
- [34] Asaithambi P, Beyene D, Alemayehu E (2017) Treatment of landfill leachate waste using sono (US) and photo (UV) based advanced oxidation processes: Studies on various operating parameters. *Desalin Water Treat* 94: 147–155. <https://doi.org/10.5004/dwt.2017.21583>
- [35] Spuhler D, Antonio J (2016) Solar disinfection is an augmentable, in situ -generated photo-Fenton reaction – Part 1: A review of the mechanisms and the fundamental aspects of the process. "Applied Catal B, Environ. <https://doi.org/10.1016/j.apcatb.2016.06.009>
- [36] Faiqun M, Islam U, Agung S, et al (2007) Removal of COD and turbidity to improve wastewater quality using electrocoagulation technique REMOVAL OF COD AND TURBIDITY TO IMPROVE WASTEWATER QUALITY USING ELECTROCOAGULATION TECHNIQUE.
- [37] Lima Santos Klienchen Dalari B, Lisboa Giroletti C, Dalri-Cecato L, et al (2020) Application of heterogeneous photo-fenton process using chitosan beads for textile wastewater treatment. *J Environ Chem Eng* 8: 103893. <https://doi.org/10.1016/j.jece.2020.103893>
- [38] Ioannou LA, Fatta-Kassinos D (2013) Solar photo-Fenton oxidation against the bioresistant fractions of winery wastewater. *J Environ Chem Eng* 1: 703–712. <https://doi.org/10.1016/j.jece.2013.07.008>
- [39] Pe GA, Zú H (2018) Application of solar photo-Fenton for benzophenone-type UV fi lters removal. 217:. <https://doi.org/10.1016/j.jenvman.2018.03.075>
- [40] Lon A, Koprivanac N (2007) Fenton type processes for minimization of organic content in coloured wastewaters : Part I: Processes optimization 'ic. 74: 380–387. <https://doi.org/10.1016/j.dyepig.2006.02.022>
- [41] Guzman PV-, Giannakis S, Rtimi S, et al (2017) Applied Catalysis B: Environmental A green solar photo-Fenton process for the elimination of bacteria and micropollutants in municipal wastewater treatment using mineral iron and natural organic acids. "Applied Catal B, Environ 219: 538–549. <https://doi.org/10.1016/j.apcatb.2017.07.066>
- [42] Asaithambi P, Alemayehu E, Sajjadi B, et al (2017) Electrical energy per order determination for the removal pollutant from industrial wastewater using UV /  $\text{Fe}^{2+}$  /  $\text{H}_2\text{O}_2$  process: Optimization by response surface methodology. *Water Resour Ind* 18: 17–32. <https://doi.org/10.1016/j.wri.2017.06.002>

- [43] Vijay S, Peralta-herna JM, Pacheco-a MA (2018) Photo and Solar Fenton Processes for Wastewater Treatment. 223–237. <https://doi.org/10.1016/B978-0-12-813160-2.00009-2>
- [44] Rizzo L, Malato S, Antakyali D, et al (2019) Science of the Total Environment Consolidated vs new advanced treatment methods for the removal of contaminants of emerging concern from urban wastewater. 655: 986–1008. <https://doi.org/10.1016/j.scitotenv.2018.11.265>
- [45] Palaniandy P, Bin H, Aziz A, Feroz S (2016) Evaluation of the solar photo-Fenton process to treat the petroleum wastewater by response surface methodology (RSM) Evaluation of the solar photo-Fenton process to treat the petroleum wastewater by response surface methodology (RSM). Environ Earth Sci. <https://doi.org/10.1007/s12665-015-5192-y>